




installabile solo a soffitto recessed ceiling only

LED A-A** □ ▽ IP65 CE

Codice Code	Finitura Finishing	K	Flusso Flux	CRI	Potenza Wattage	Dimensioni Dimension	Ottica Optics	Peso Weight
20005-B-C	bianco white	3000K	425 lm	≥ 80	5W - 220/240V	Ø83x65 mm		0,3 Kg
20005-B-F	bianco white	4000K	450 lm	≥ 80	5W - 220/240V	Ø83x65 mm		0,3 Kg
20005-CR-C	cromo chrome	3000K	425 lm	≥ 80	5W - 220/240V	Ø83x65 mm		0,3 Kg
20005-CR-F	cromo chrome	4000K	450 lm	≥ 80	5W - 220/240V	Ø83x65 mm		0,3 Kg
MEA001NO	nickel opaco matt nickel	3000K	425 lm	≥ 80	5W - 220/240V	Ø83x65 mm		0,3 Kg
MEA002NO	nickel opacp matt nickel	4000K	450 lm	≥ 80	5W - 220/240V	Ø83x65 mm		0,3 Kg

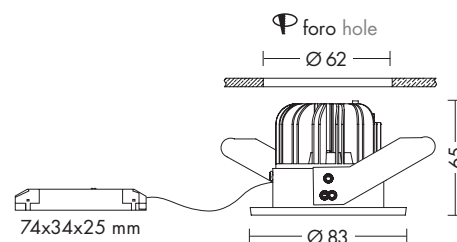


> cassaforma per muratura pag. 598
casting box pag. 598



installabile solo a soffitto recessed ceiling only

LED A-A** □ ▽ IP65 CE

Codice Code	Finitura Finishing	K	Flusso Flux	CRI	Potenza Wattage	Dimensioni Dimension	Ottica Optics	Peso Weight
20005Q-B-C	bianco white	3000K	425 lm	≥ 80	5W - 220/240V	85x85x65 mm		0,3 Kg
20005Q-B-F	bianco white	4000K	450 lm	≥ 80	5W - 220/240V	85x85x65 mm		0,3 Kg
20005Q-CR-C	cromo chrome	3000K	425 lm	≥ 80	5W - 220/240V	85x85x65 mm		0,3 Kg
20005Q-CR-F	cromo chrome	4000K	450 lm	≥ 80	5W - 220/240V	85x85x65 mm		0,3 Kg
MEA003NO	nickel opaco matt nickel	3000K	425 lm	≥ 80	5W - 220/240V	85x85x65 mm		0,3 Kg
MEA004NO	nickel opaco matt nickel	4000K	450 lm	≥ 80	5W - 220/240V	85x85x65 mm		0,3 Kg

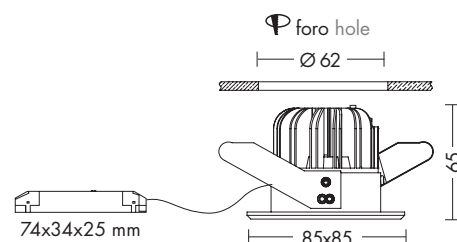

> cassaforma per muratura pag. 598
casting box pag. 598