




LED **IP20 CE**

Codice Code	Finitura Finishing	K	Flusso Flux	CRI	Potenza Wattage	Dimensioni Dimension	Ottica Optics	Peso Weight
LAU007B	bianco white	3000K	3720 lm	≥ 90	42W - 220/240V	Ø95x245x280 mm		1,9 Kg
LAU008B	bianco white	4000K	3910 lm	≥ 90	42W - 220/240V	Ø95x245x280 mm		1,9 Kg
LAU007GR	grigio grey	3000K	3720 lm	≥ 90	42W - 220/240V	Ø95x245x280 mm	*	1,9 Kg
LAU008GR	grigio grey	4000K	3910 lm	≥ 90	42W - 220/240V	Ø95x245x280 mm		1,9 Kg
LAU007N	nero black	3000K	3720 lm	≥ 90	42W - 220/240V	Ø95x245x280 mm		1,9 Kg
LAU008N	nero black	4000K	3910 lm	≥ 90	42W - 220/240V	Ø95x245x280 mm		1,9 Kg

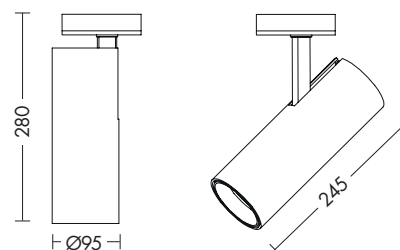

* Disponibili ottiche intercambiabili MAA412OT, MAA424OT e MAA460OT per cambio apertura fascio rispettivamente a 12°, 24° e 60°.

Available interchangeable optics MAA412OT, MAA424OT e MAA460OT to change light beam respectively at 12°, 24° and 60°.