

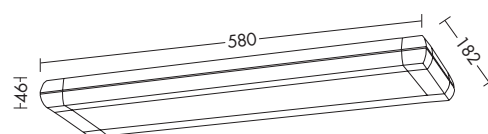





 MADE IN MILANO **LED**   IP20 CE

Codice Code	Finitura Finishing	K	Flusso Flux	CRI	Potenza Wattage	Dimensioni Dimension	Optica Optics	Peso Weight
MONOEMISSIONE DIRECT LIGHT								
WIR109B	bianco white	3000K	2850 lm	≥ 80	20W - 220/240V	580x182x46 mm		2,1 Kg
WIR110B	bianco white	4000K	3000 lm	≥ 80	20W - 220/240V	580x182x46 mm		2,1 Kg
WIR109GR	grigio grey	3000K	2850 lm	≥ 80	20W - 220/240V	580x182x46 mm		2,1 Kg
WIR110GR	grigio grey	4000K	3000 lm	≥ 80	20W - 220/240V	580x182x46 mm		2,1 Kg
BIEMISSIONE DIRECT-INDIRECT LIGHT								
WIR111B	bianco white	3000K	5320 lm	≥ 80	20W+18W-220/240V	580x182x46 mm		2,3 Kg
WIR112B	bianco white	4000K	5600 lm	≥ 80	20W+18W-220/240V	580x182x46 mm		2,3 Kg
WIR111GR	grigio grey	3000K	5320 lm	≥ 80	20W+18W-220/240V	580x182x46 mm		2,3 Kg
WIR112GR	grigio grey	4000K	5600 lm	≥ 80	20W+18W-220/240V	580x182x46 mm		2,3 Kg



Info tecniche Technical info



Esclusivo sistema di aggancio rapido senza l'ausilio di utensili
Exclusive fixing system for a quick tool-free installation