





320 mm

MADE IN
MILANO **LED** A □ IP20 CE


Codice Code	Finitura Finishing	K	Flusso Flux	CRI	Potenza Wattage	Dimensioni Dimension	Ottica Optics	Peso Weight
MONOEMISSIONE DIRECT LIGHT								
CAB109B	bianco white	3000K	2660 lm	≥ 80	23W - 220/240V	322x322x46 mm		1,7 Kg
CAB110B	bianco white	4000K	2800 lm	≥ 80	23W - 220/240V	322x322x46 mm		1,7 Kg
CAB109GR	grigio grey	3000K	2660 lm	≥ 80	23W - 220/240V	322x322x46 mm		1,7 Kg
CAB110GR	grigio grey	4000K	2800 lm	≥ 80	23W - 220/240V	322x322x46 mm		1,7 Kg
BIEMISSIONE DIRECT-INDIRECT LIGHT								
CAB113B	bianco white	3000K	3800 lm	≥ 80	23W+8W-220/240V	322x322x46 mm		1,9 Kg
CAB114B	bianco white	4000K	4000 lm	≥ 80	23W+8W-220/240V	322x322x46 mm		1,9 Kg
CAB113GR	grigio grey	3000K	3800 lm	≥ 80	23W+8W-220/240V	322x322x46 mm		1,9 Kg
CAB114GR	grigio grey	4000K	4000 lm	≥ 80	23W+8W-220/240V	322x322x46 mm		1,9 Kg

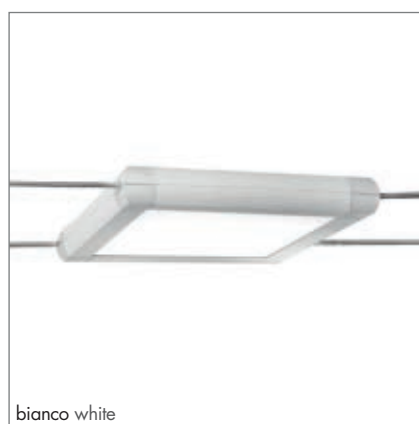





bianco white

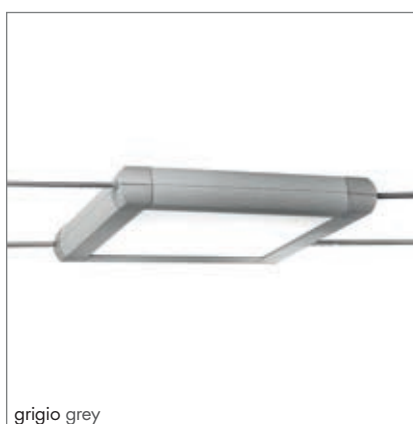

grigio grey

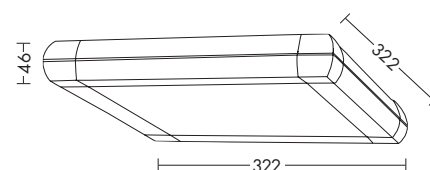

Info tecniche Technical info



Esclusivo sistema di aggancio rapido senza l'ausilio di utensili.
Exclusive fixing system for a quick tool-free installation.